



QRH400 is a brother of DRH370. This dual-polarized broadband antenna with frequency from 400 MHz up to 6 GHz, this antenna is perfect for big chambers and EMC measurements. The addition of two spirit levels is a matter of course, thanks to which your measurement in both planes will be very accurate and fun.

Cloned antenna series are available through [AU Technology](#), which guarantees constant parameters.

Features and Specifications



Technical Performance

- Wide bandwidth
- Low return loss
- Individual calibration



Design and Surface Treatment

- Corrosion-resistant coating
- Includes standard mount
- Very precise spirit level for both polarizations



Manufacturing Technology

- Extremely durable
- High quality N type coaxial connector



Product Packaging Includes

- Linear polarized double ridged broadband horn antenna
- Universal antenna mount

Product Parameters

PRODUCT IDENTIFICATION

Product Name	QRH400
Product Category	Quad Ridged Horn Antenna

ELECTRICAL SPECIFICATIONS

Frequency Range	400 MHz – 6 GHz
VSWR (max.)	2.3
VSWR (avg.)	1.5
Impedance	50 Ohm
Connector	N (female)
Power (CW / Peak)	500 W / 700 W
Antenna Factor	17 – 33 dB/m
Port Isolation	-32 dB
Polarization	Dual Linear, Circular (with hybrid)

PHYSICAL SPECIFICATIONS

Width	335 mm (13.189 in)
Height	433 mm (17.047 in)
Depth	335 mm (13.189 in)
Weight	4 kg (8.818 lb)

OPERATING CONDITIONS


Rated Temperature Range	0°C – +50°C
Storage Temperature Range	-20°C – +70°C

MOUNTING FLANGE


Mounting	Universal antenna mount
----------	--------------------------------

Mechanical Drawings

Antenna

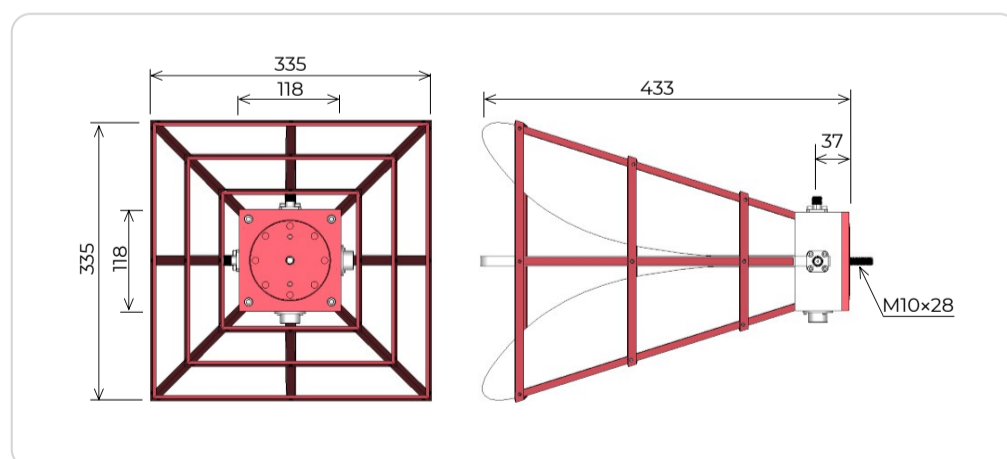


Mounting flange

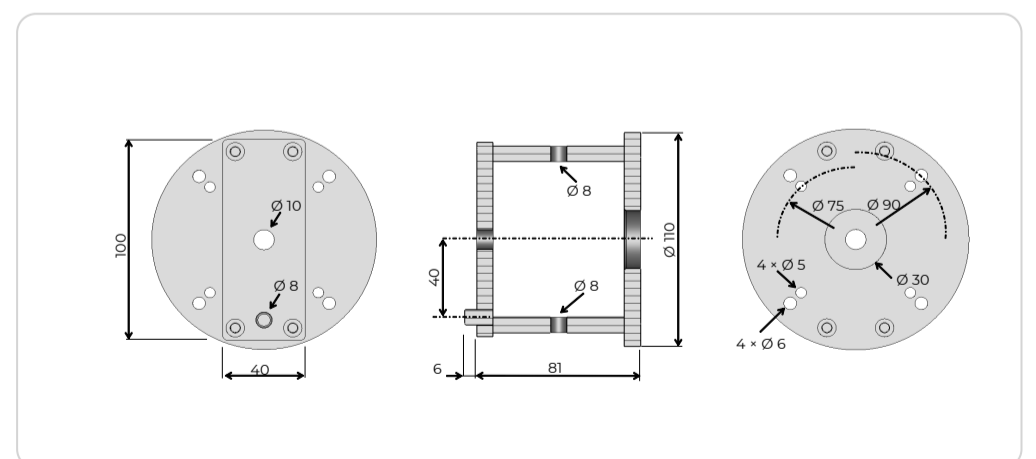


Parameters and Performance

Typical parameters


VSWR

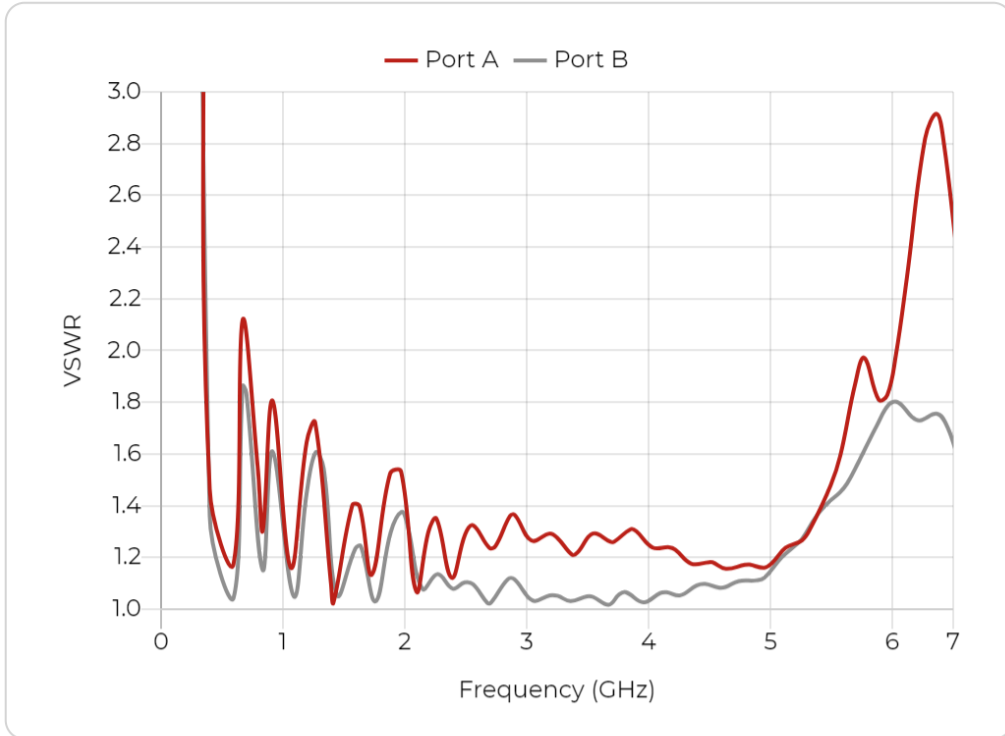


Gain

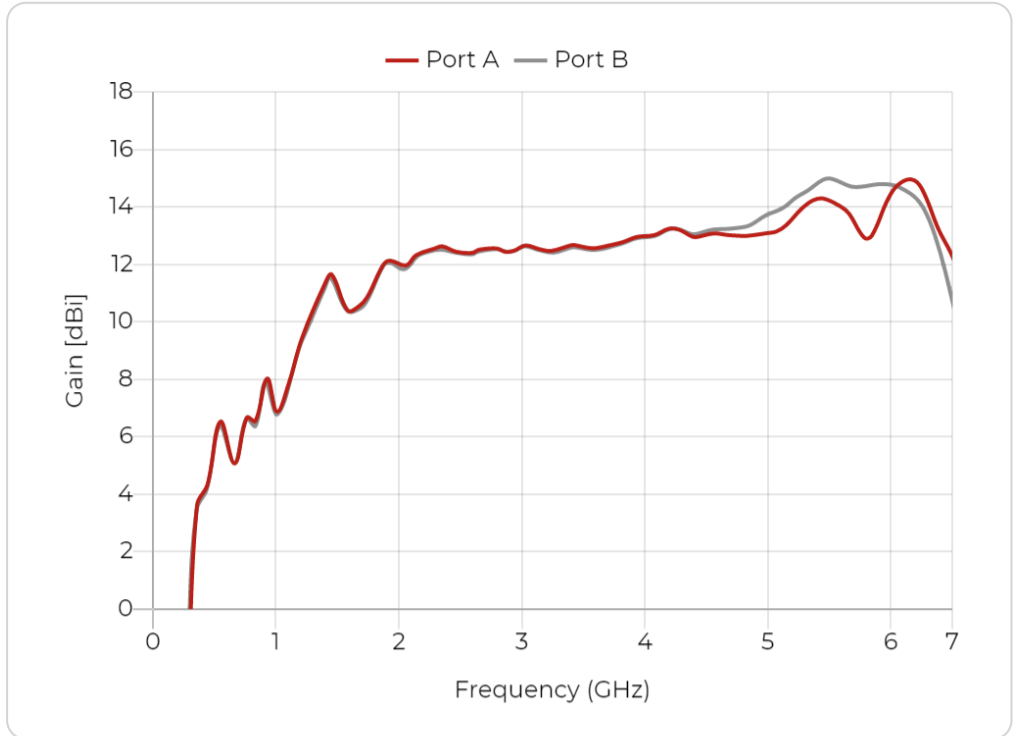


Antenna Factor

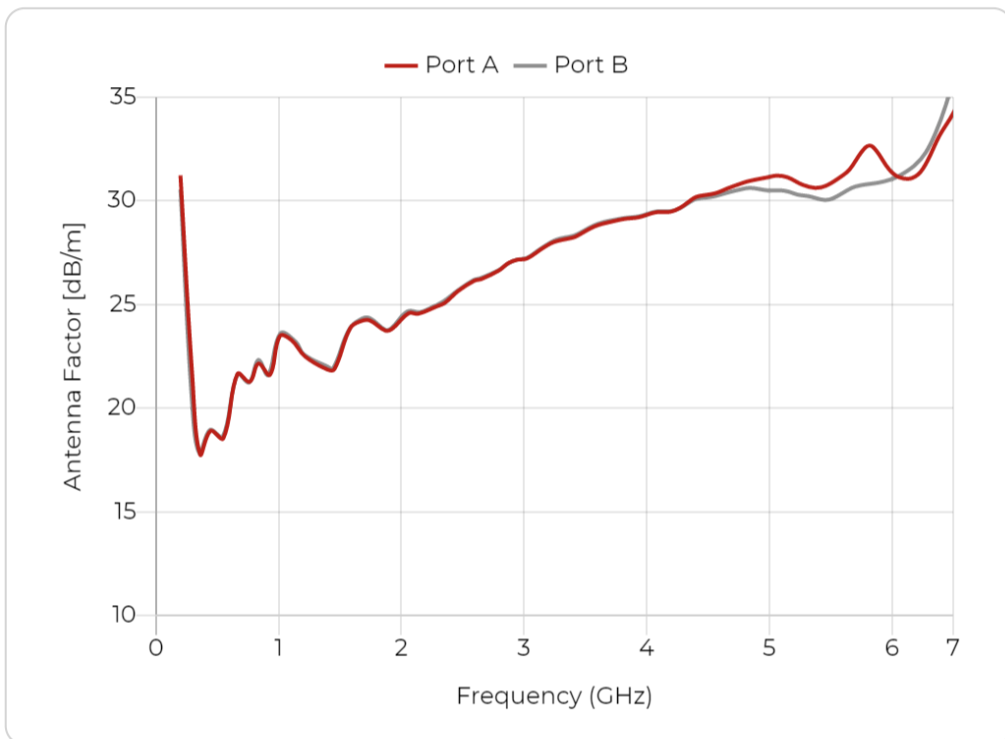

Port Isolation

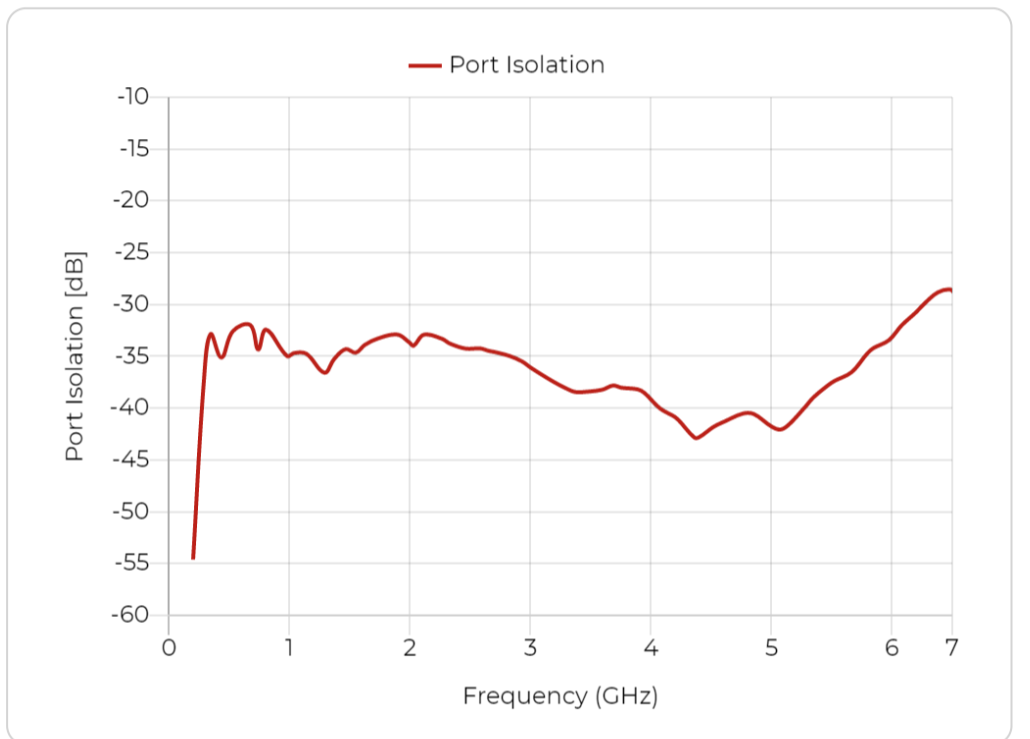


Cross Polarization

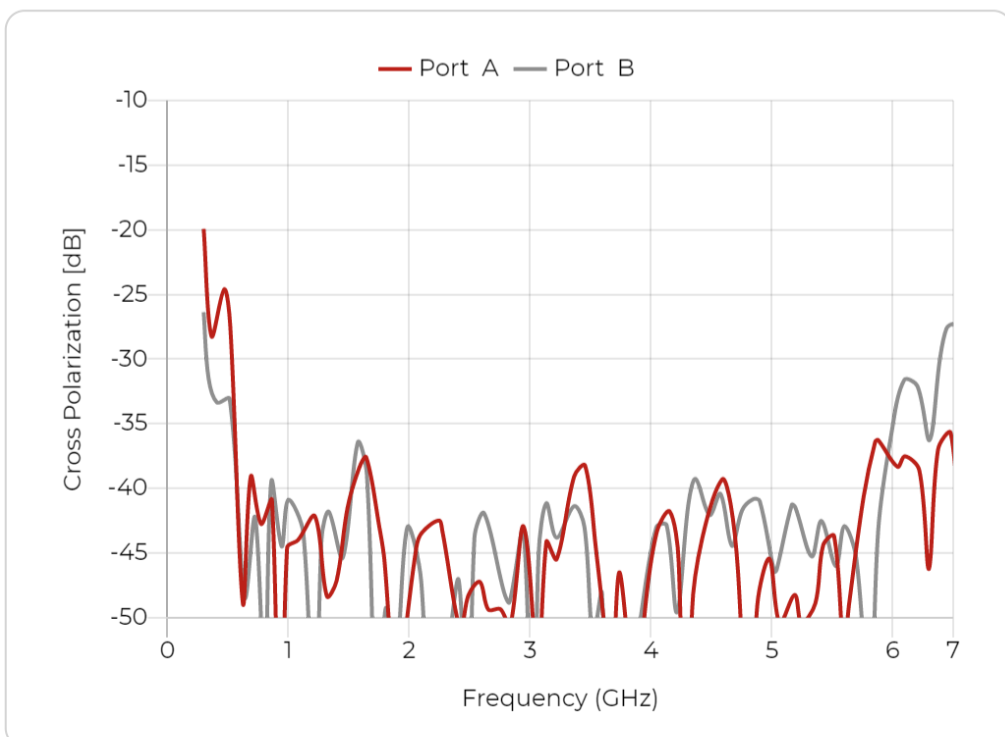


Beamwidth


Port A, E plane

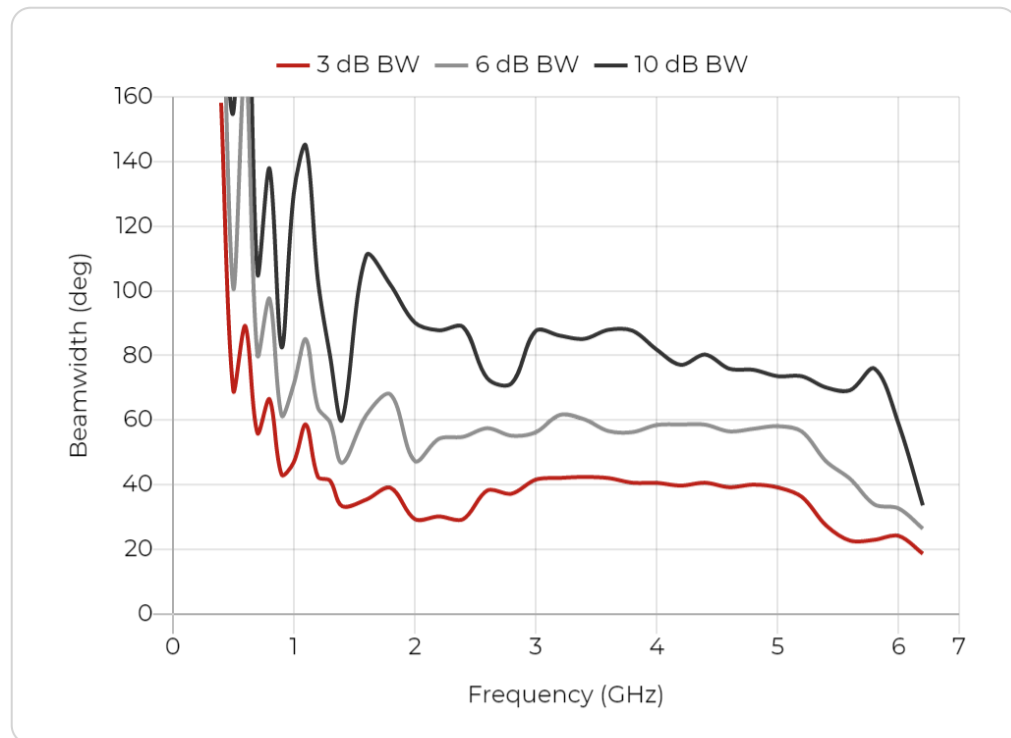


Port A, H plane

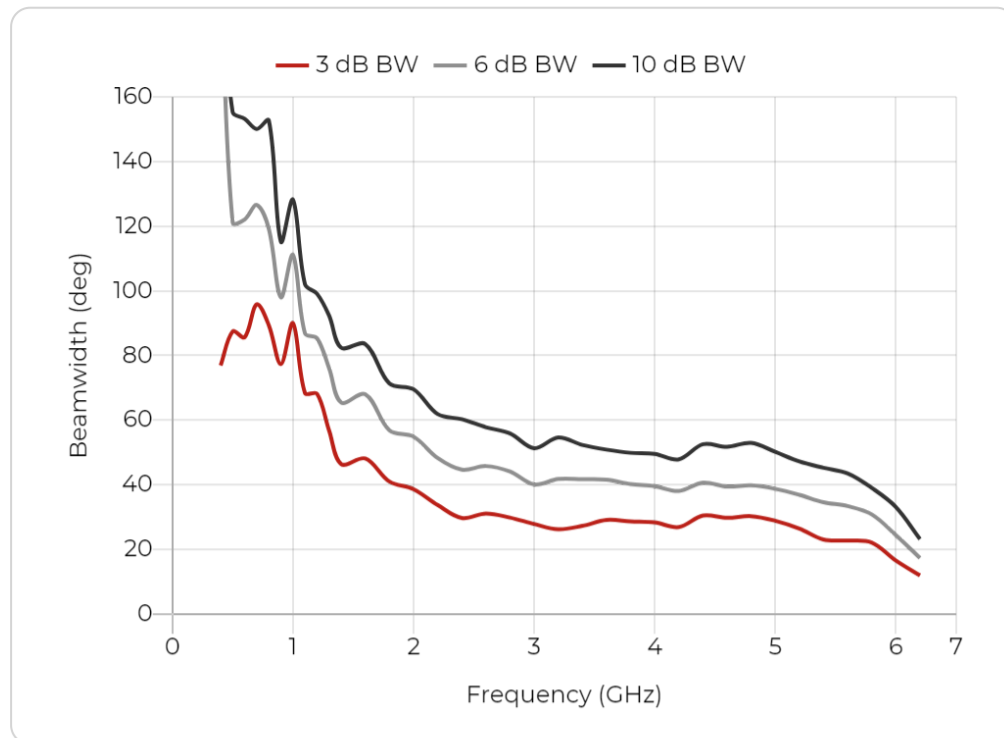

Port B, E plane

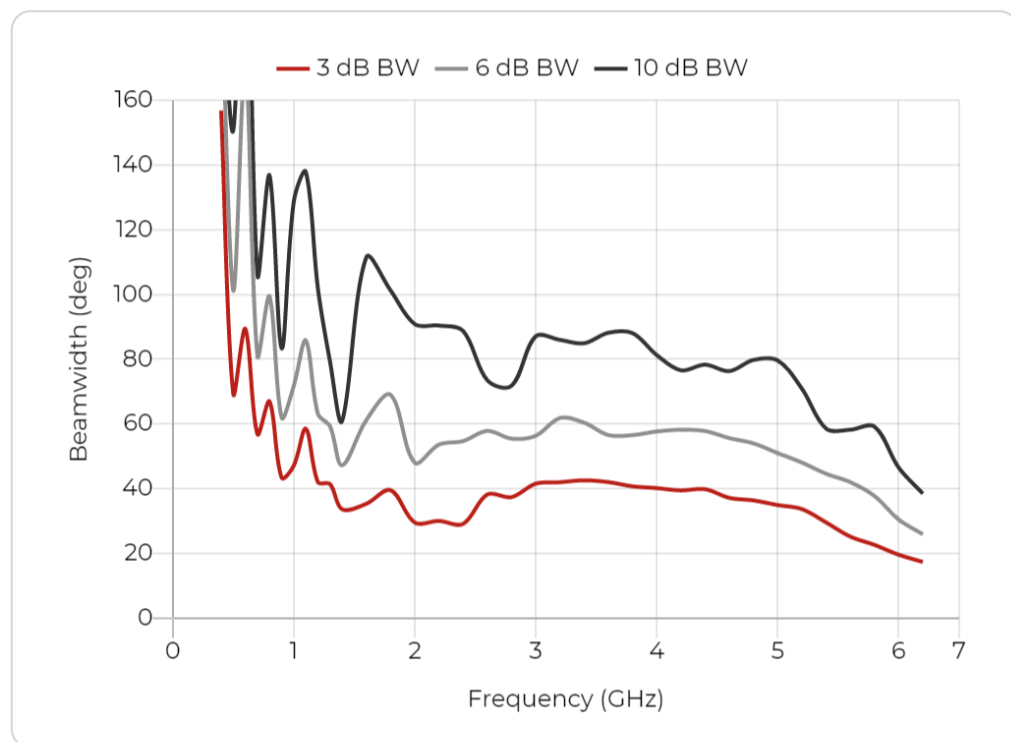


Port B, H plane

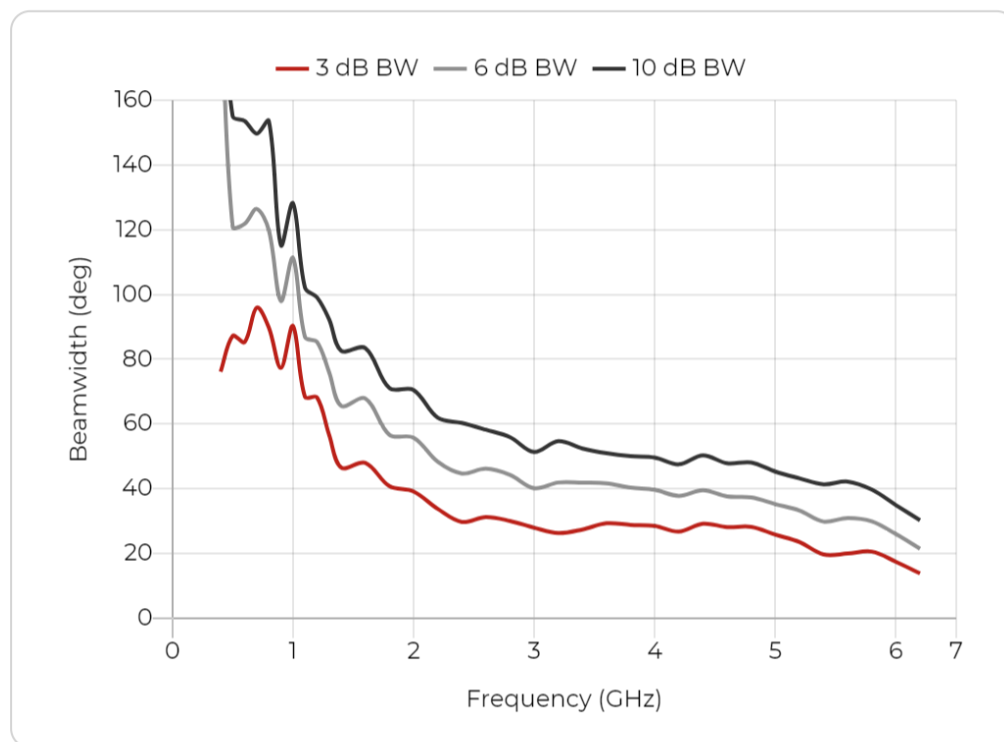


Radiation Patterns - Port A


Port A, 0.4 GHz

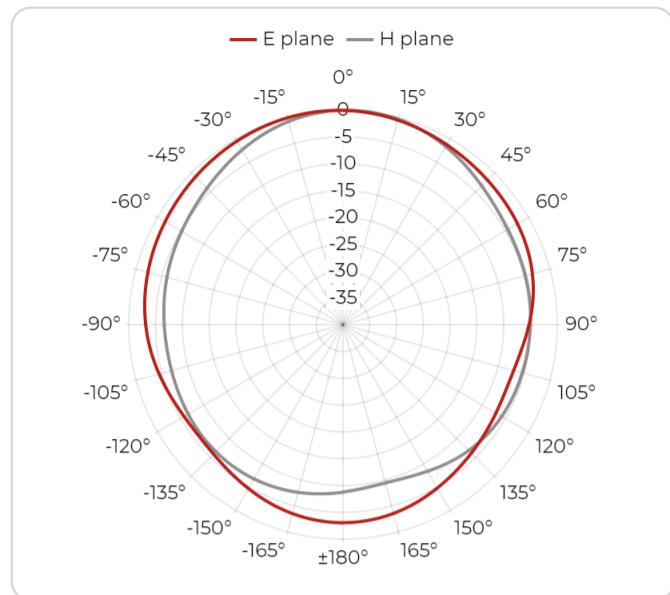


Port A, 0.6 GHz

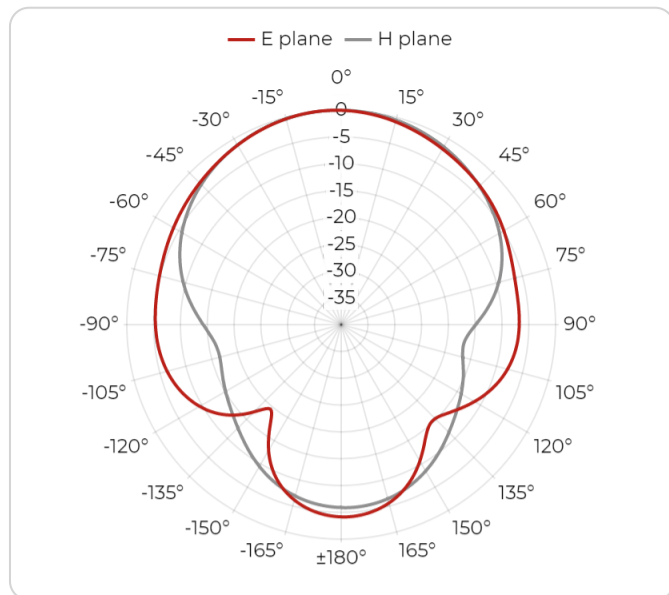


Port A, 1 GHz

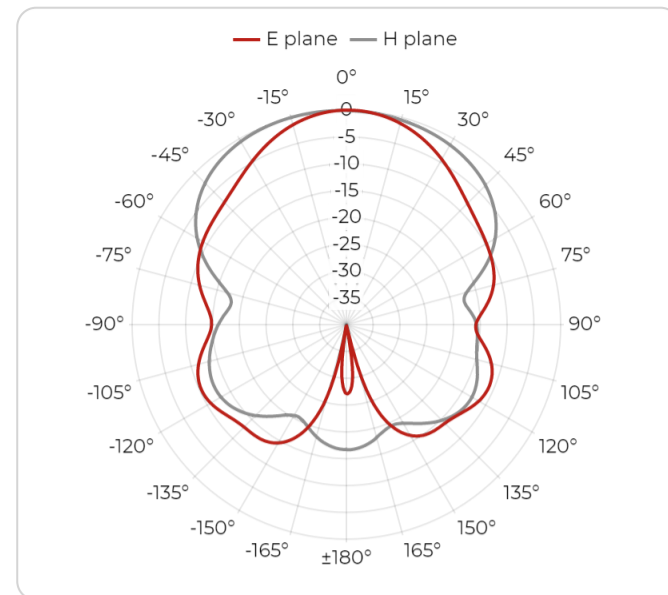


Port A, 1.4 GHz

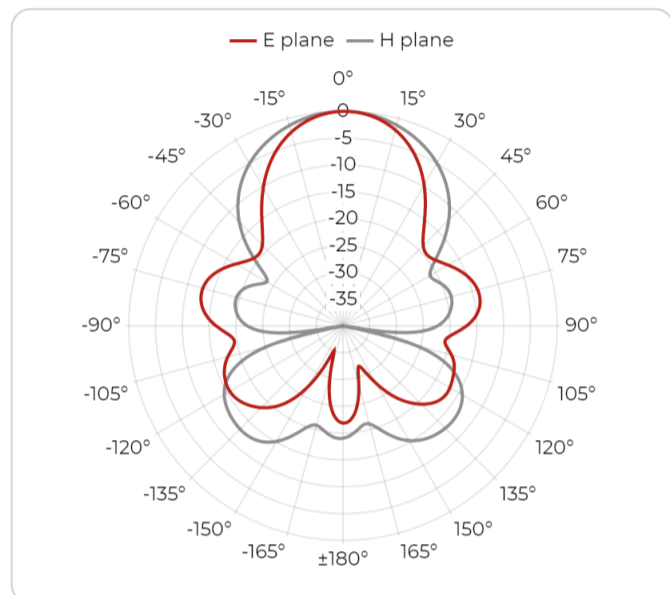


Port A, 1.8 GHz

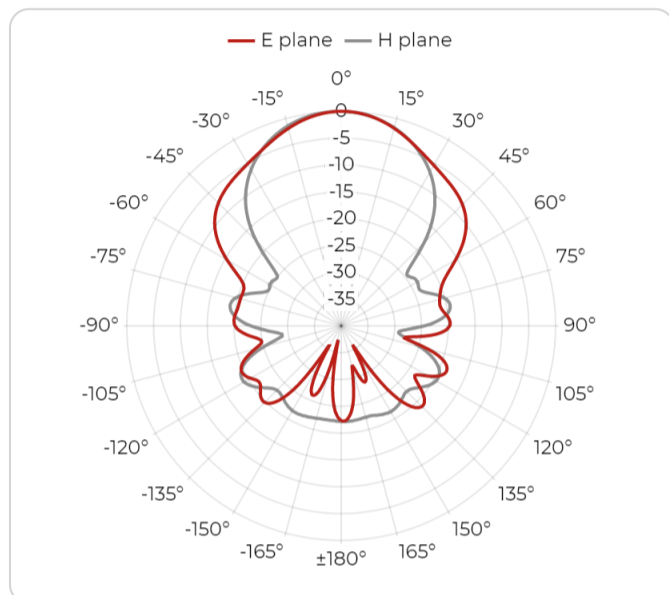


Port A, 2.4 GHz

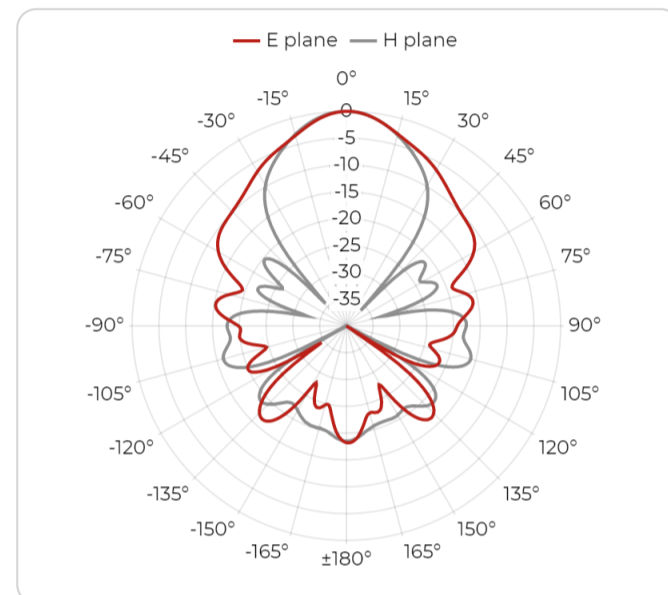


Port A, 3 GHz

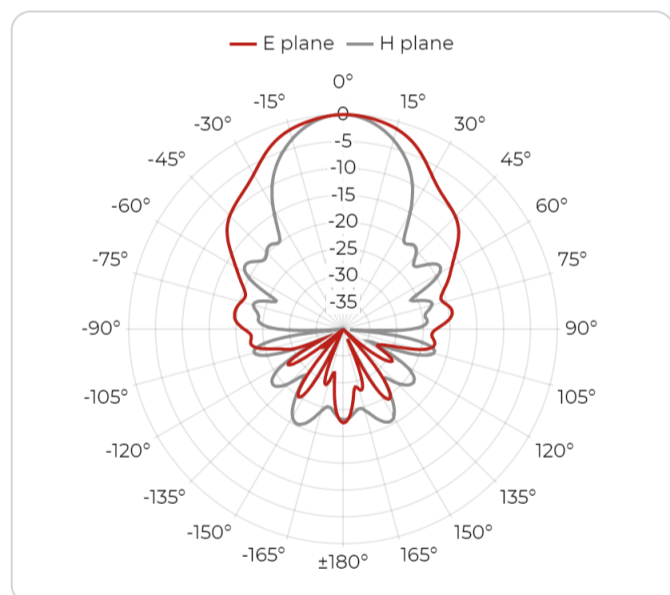


Port A, 3.6 GHz

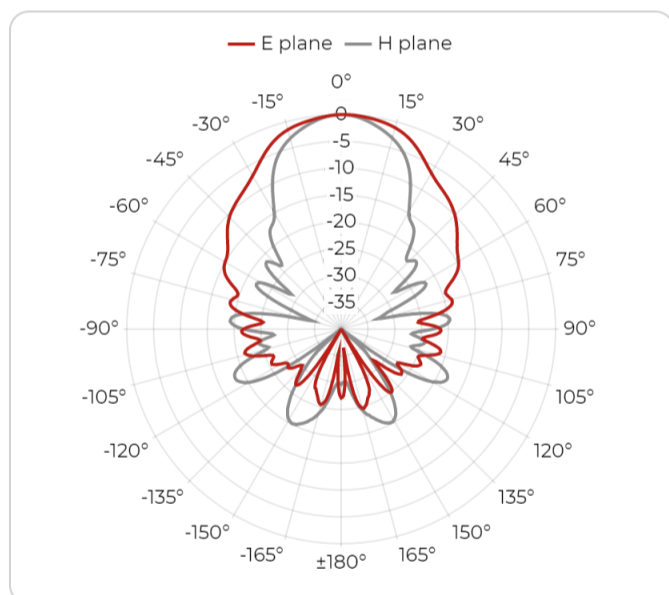


Port A, 4.2 GHz

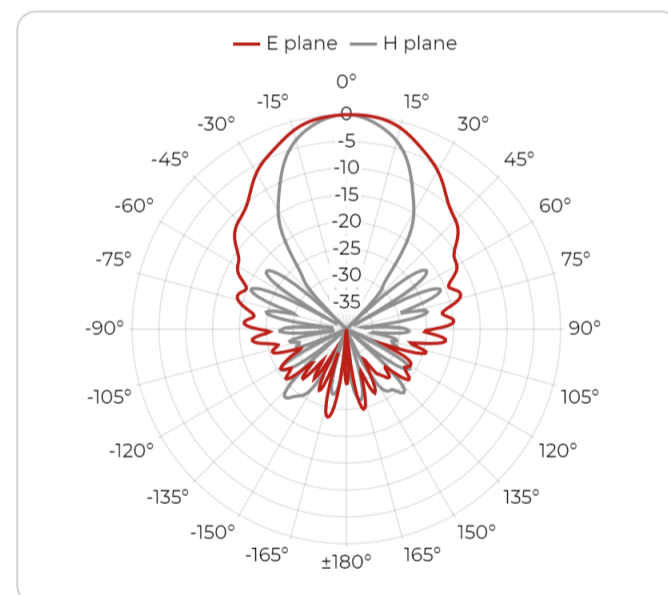


Port A, 4.8 GHz

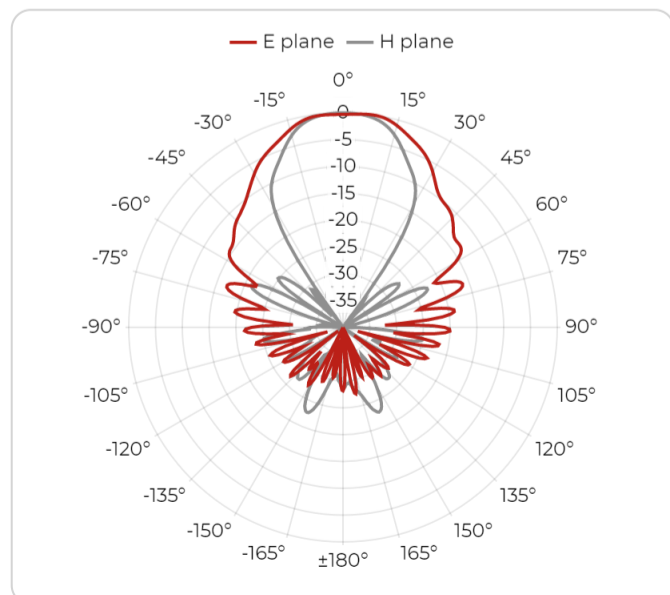

Port A, 5.4 GHz

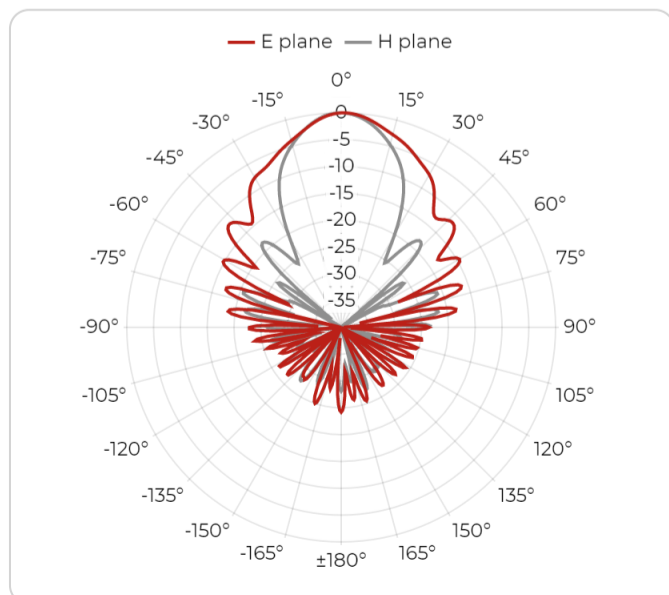


Port A, 6 GHz

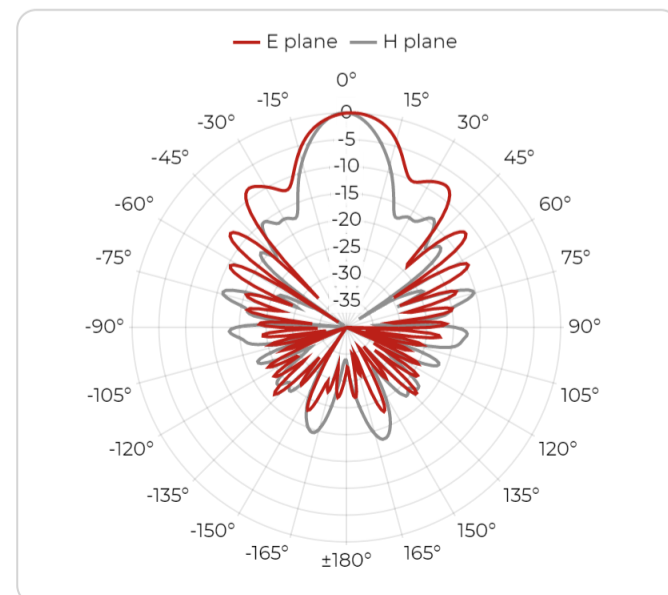


Radiation Patterns - Port B


Port B, 0.4 GHz

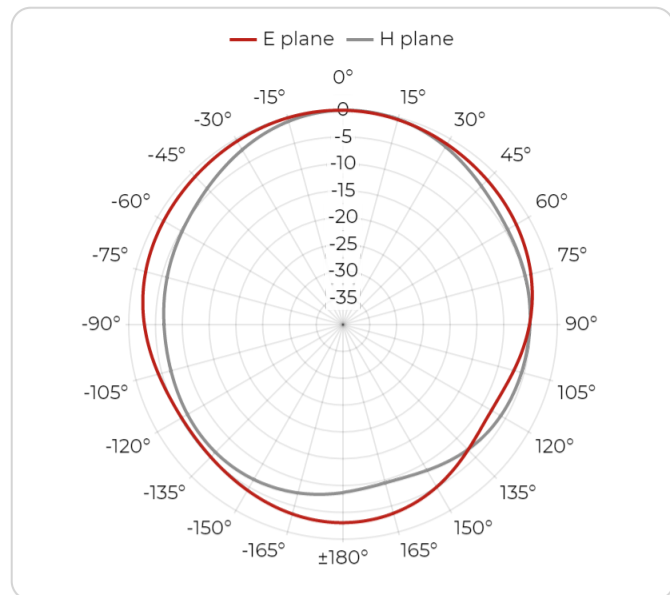


Port B, 0.6 GHz

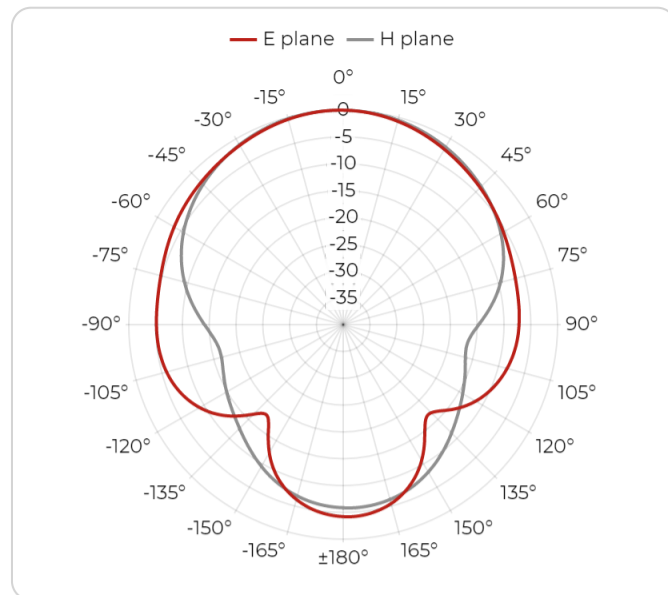


Port B, 1 GHz

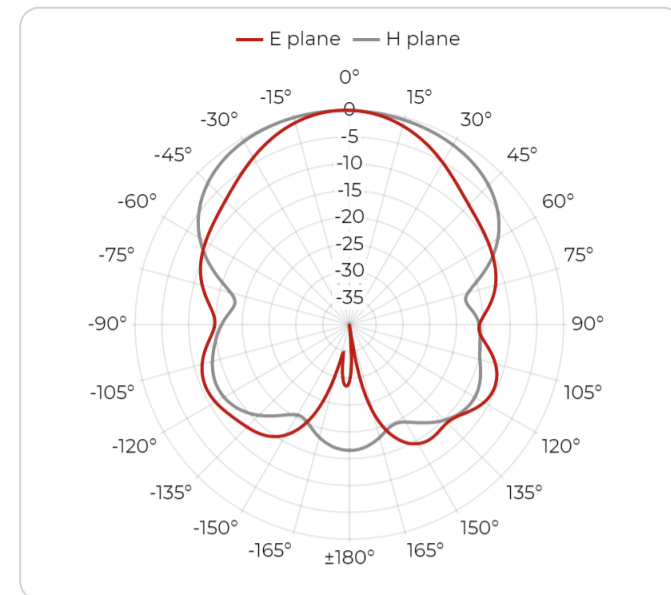


Port B, 1.4 GHz

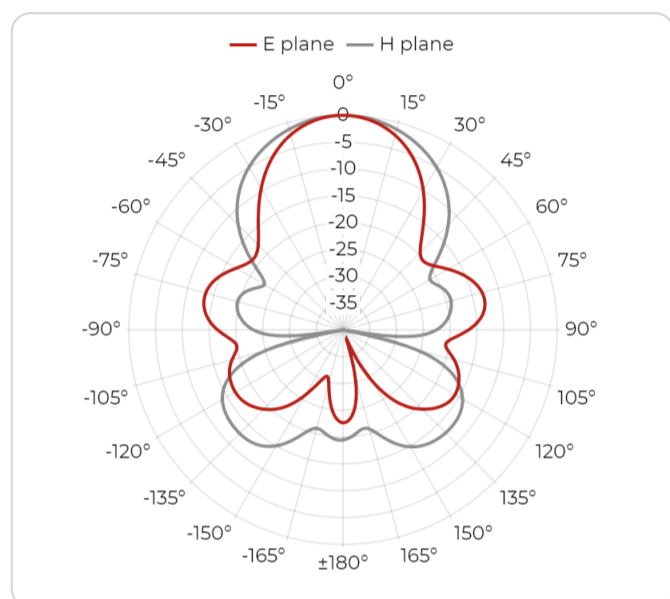


Port B, 1.8 GHz

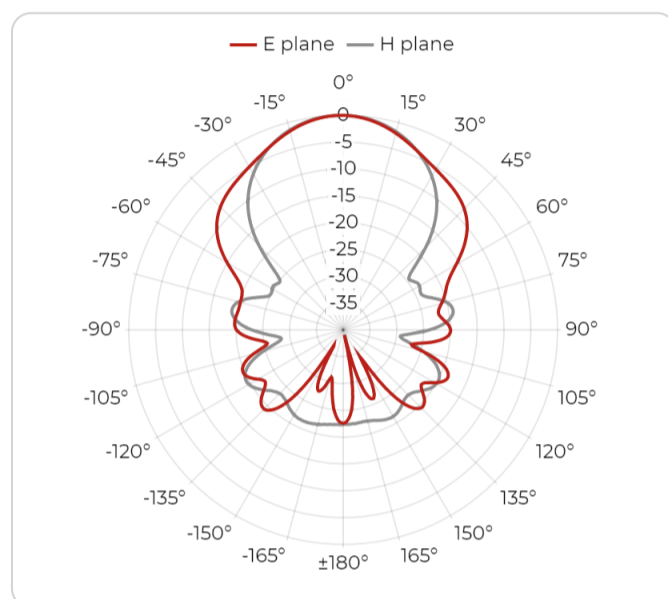


Port B, 2.4 GHz

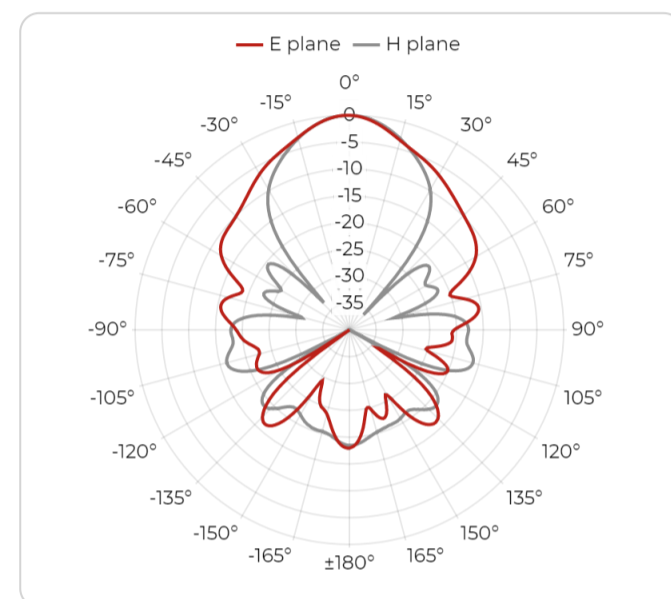


Port B, 3 GHz

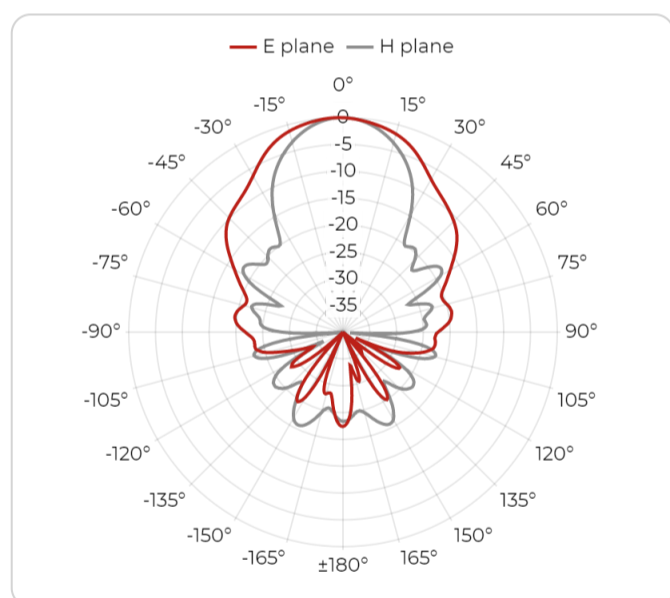


Port B, 3.6 GHz

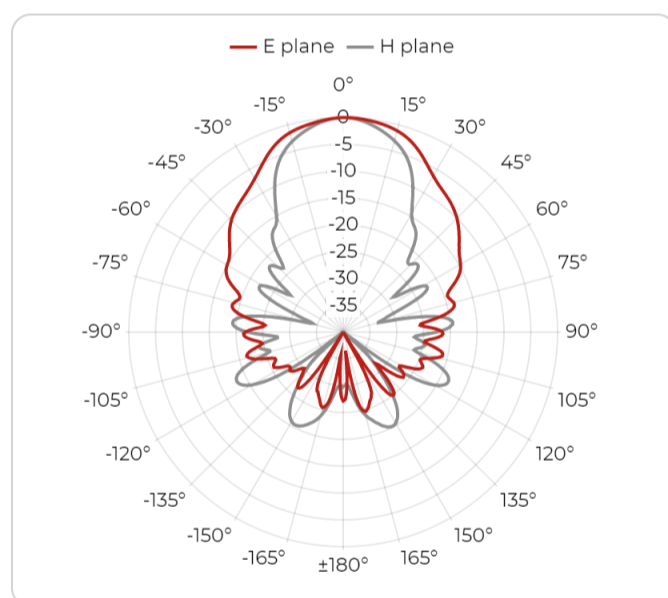


Port B, 4.2 GHz

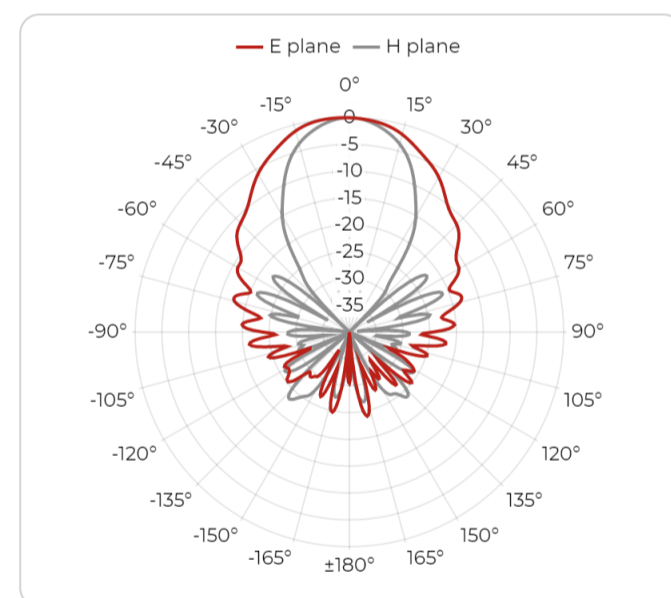


Port B, 4.8 GHz

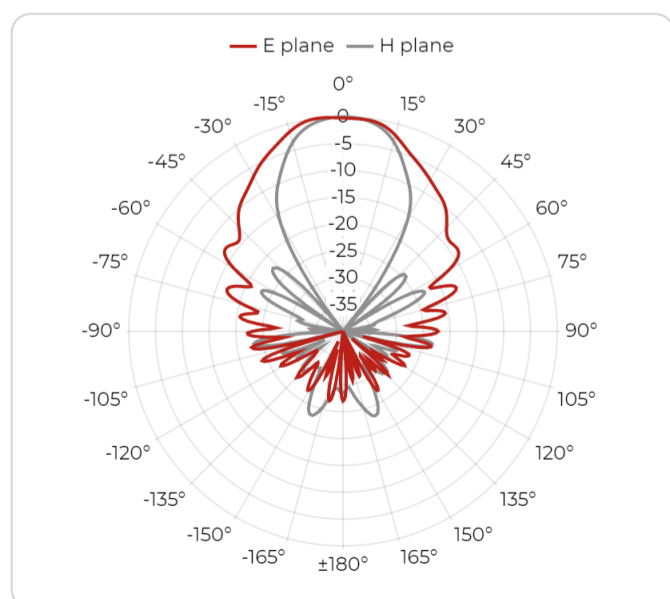

Port B, 6 GHz

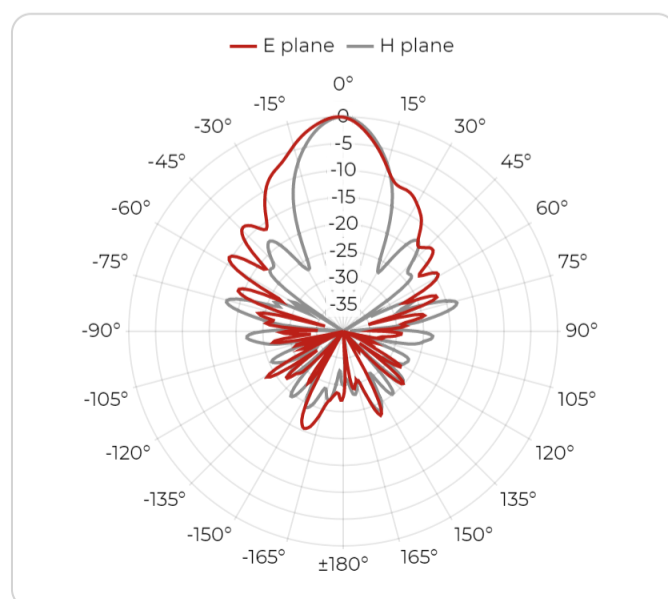

Port B, 5.4 GHz

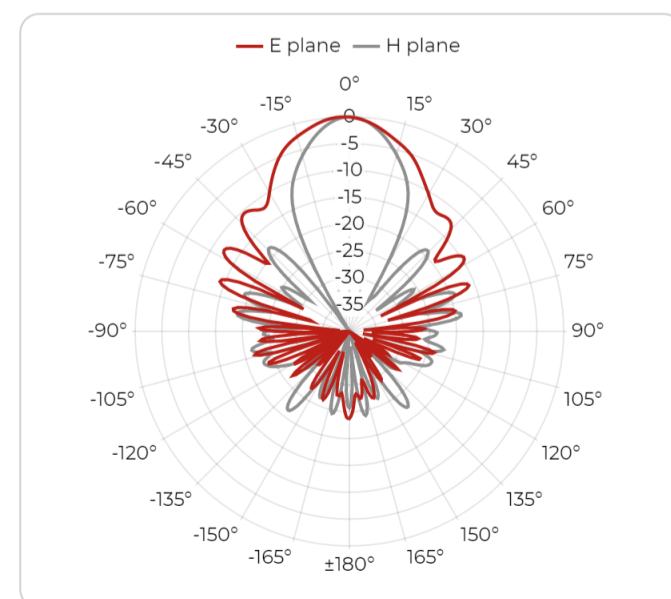

Packaging and Accessories

What's in a box

- QRH400 Antenna
- Antenna specific mount adapter with ¼ inch inner thread
- Factory calibration certificate
- Full calibration report of each antenna
- QR code accessing online portal
- Calibration test dataset (available online)

Accessories

- Standard mounting flange

Custom services

- Custom mounting solutions
- Custom calibration data

Manufacturer Information

About Datasheet

Product information available also online at
<https://www.rfspin.com/product/grh400/>

Data and specifications subject to change without notice.

Datasheet revision 02-2024.

© RFspin 2024

📍 Address

RFspin s.r.o.
Na Beránce 57/2
160 00 Prague 6
Czech Republic

✉ E-mail

info@rfspin.com

📞 Phone

[+420 245 008 847](tel:+420245008847)